## WM SERIES

Wall-Mounted Mains-Connected Water Coolers

Mounted on the wall and designed specifically for small spaces or restricted floor space, the WM Series is ideal for easy access by people in wheelchairs or for children.









- 19 Litres Per Hour
- Industrial grade tank and robust construction
- Polished stainless steel top
- Front panel removes for ease of servicing
- Adjustable, tamper proof non-squirt bubbler and glass filler

The WM Series is designed with an easily removable front panel that gives instant access to all components and controls. Hassle-free filter changes and services can be undertaken without disconnecting the plumbing.

With fingerprint-proof coating on powder coated options, this robust water dispenser fits marvellously at worksites.

Aqua Cooler products are manufactured from the highest quality components supplied from the industry's leading suppliers and designed to run efficiently with low maintenance.




| Model Selection Chart      |                            |                        |  |
|----------------------------|----------------------------|------------------------|--|
|                            | 19 Litres Per Hour         |                        |  |
| Cabinet                    | 15 - 40 People (Worksite)* |                        |  |
|                            | Bubbler                    | Bubbler & Glass Filler |  |
| Dark Grey Powder Coat      | WM4                        | WM5                    |  |
|                            |                            |                        |  |
| * Approximate figures only |                            |                        |  |



## **TECHNICAL SPECIFICATIONS**

| Water Reservoir     | 5 L water tank is fabricated from industrial grade steel for longevity.  |                           |
|---------------------|--|---------------------------|
| Refrigeration       | Uses R134A refrigerant which is non-toxic, non-flammable and environmentally sympathetic. The refrigerant flow is controlled by a capillary tube, which has no moving parts. |                           |
|                     | WM4/WM5  | R134a - 125g              |
| Water Flow Controls | The bubbler is rated to supply 1.7 L/m at mains water pressure of between 140 and 700 kPa.   |                           |
| Water Connections   | Water Inlet  | ½" Male B.S.P.            |
|                     | Water Outlet   | 40mm Female P.V.C. Socket |
| Thermostat Control  | The thermostat is factory set  |                           |
|                     | WM4/WM5  | PW5.5VK, 1/6 HP, 148 W    |
| Condenser           | Copper tube and expanded aluminium fin   |                           |
| Electrical          | 220-240 V, 50/60 Hz  |                           |
|                     | WM4/WM5  | 17 kg                     |
| Dimensions (Packed) | 300 x 300 x 545 mm (W x D x H)   |                           |
| Warranty            | Twelve month comprehensive coverage, additional twenty-four month compressor replacement.  |                           |

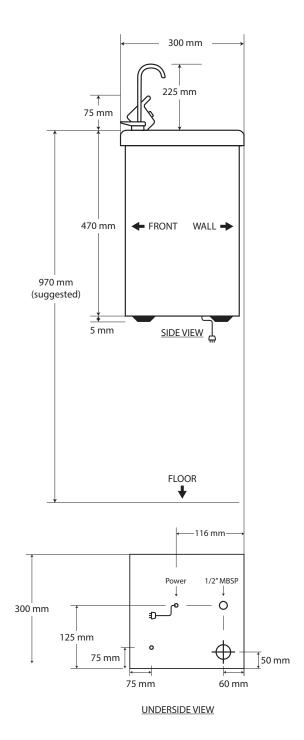



**Phone Numbers** 0800 500 545

Address 101 Onehunga Mall, PO Box 24506 Royal Oak, Auckland 1345

www.filtersandfountains.co.nz sales@filtersandfountains.co.nz